


# Sto BTS® Plus ←

727

Division 7

727 Sto BTS Plus

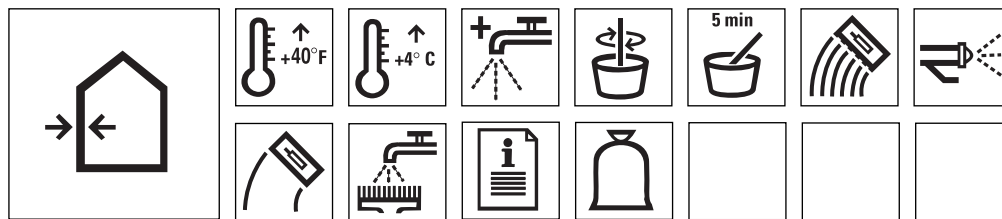

## Technical Data

REPORT	TEST METHOD	TEST CRITERIA	TEST RESULTS
<b>Surface Burning</b>	ASTM E-84	< 25 Flame Spread < 450 Smoke Developed	0 5
<b>Adhesion (psi)</b>	ASTM C-297 Modified	28 days	> 30 Gypsum Sheathing* > 15 EPS Board* > 100 Concrete Block > 40 Dens-Glass® Gold** > 100 Concrete
<b>Impact Strength</b>	EIMA 101.86	Standard Impact Classification	Pass

\* Failure of substrate

\*\* Dens-Glass Gold is a registered trademark of the G-P Gypsum Corp.

*Sto BTS Plus is a one-component, polymer-modified, cement based, dry powder material used as an adhesive and base coat in Sto Insulated Wall Claddings, including StoTherm Classic NExT™ and StoTherm Premier NExT™. It is specially designed to provide for the recommended minimum 1/16" base coat thickness in a single application.*

### Coverage

"Through the wall": 55-75 ft² (5.1-7.0 m²) per bag (when used for both adhesive and base coat applications).

As an adhesive over sheathing: 90-135 ft² (8.4-12.5 m²) per bag, applied with a 1/2" x 1/2" (13 mm x 13 mm) U-notched trowel.

As an adhesive over masonry: 85-100 ft² (7.9-9.3 m²) per bag, applied with a 5/8" x 5/8" (16 mm x 16 mm) square-notched trowel.

As a base coat: 80-125 ft² (7.4-11.6 m²) per bag.

As a skim coat: 90-135 ft² (8.4-12.5 m²) per bag.

Coverages may vary depending on application technique and surface conditions.

### Packaging

47 lb. bag (21.3 kg).

### Shelf Life

12 months, if protected from moisture and properly stored.

### Storage

Store off the ground in a dry area. Protect from direct sunlight, extreme heat [90°F (32°C)] and freezing.

Features	Benefits
<b>1 One-component</b>	Ready to use; easily mixed with water on the job site
<b>2 Polymer-modified</b>	Excellent adhesion; increases durability and freeze/thaw resistance
<b>3 High polymer/cement ratio</b>	Improved flexural strength; resists cracking
<b>4 Creamy smooth consistency</b>	Trowels easily; increases job site productivity
<b>5 Vapor permeable</b>	Allows substrate to breathe naturally; resists blisters caused by trapped vapor
<b>6 High build</b>	Labor savings; can be applied to 1/16" (1.6 mm) thickness in one application with standard reinforcing mesh
<b>7 Factory blended Portland cement</b>	Assures performance mix ratio
<b>8 Low cement ratio</b>	Less alkalinity, less free lime, less efflorescence
<b>9 Bagged powder product</b>	Less solid waste than pails; freezing protection not required prior to use

P.A.R.A : 2,2.01,A,1

# 727 Sto BTS® Plus

## Surface Preparation

**Concrete and masonry surfaces:** Surfaces must be clean, dry, and free of frost, damage, and all bond-inhibiting materials, including dirt, efflorescence, form oil and other foreign matter. Loose or damaged material must be removed by waterblasting, sandblasting or mechanical wire brushing and repaired. Avoid application over irregular surfaces. Resurface, patch or level surfaces to required tolerance and smoothness with appropriate Sto leveling materials. Refer to ASTM D-4258 and ASTM D-4261 for complete details on methods of preparing cementitious substrates for coatings.

## Mixing

Use 5-6.5 quarts (4.7-6.2 L) of water per 47 lb. bag (21.3 kg). Mix automatically using Sto's S-25 Continuous Mixer, or mix by adding one 47 lbs. (21.3 kg) bag of Sto BTS Plus to 5-6.5 quarts (4.7-6.2 L) of clean, potable water in a clean mixing pail. Mix with a clean, rust-free

## Application

Apply only to sound and clean, dry, properly prepared, frost-free surfaces.

**As an adhesive:** Apply to the back of Sto Insulation Board with the appropriate size notched trowel, or directly onto the substrate using Sto's M-8 Spray Pump, then the appropriate sized notched trowel. Form uniform ribbons of adhesive parallel to the long\* dimension of the board. Immediately install the board horizontally with staggered joints and apply firm pressure over the entire board surface.

\*NOTE: For drainage of incidental moisture, form adhesive ribbons parallel to the short dimension of the insulation board.

**As a base coat:** Apply with spray equipment such as Sto's M-8 Spray Pump or a stainless steel trowel to an approximate thickness of 1/8" (3 mm). Work horizontally or vertically in strips of 40" (1 m) and immediately embed Sto Mesh in the wet Sto BTS Plus by troweling from the center to the edges of the mesh. Avoid wrinkles in the mesh and smooth the base coat to eliminate trowel marks. Minimum

## Limitations

- Use Sto BTS Plus only when surface and ambient temperatures are above 40°F (4°C) during application and drying period.
- Sto BTS Plus should not be used on weather-exposed horizontal or below grade surfaces or where immersion in water may occur.
- Sloped surfaces: Refer to Sto details.
- Sto BTS Plus should not be used as a finish coating. It should not be used over wood surfaces except for wood sheathing surfaces protected by StoGuard.

**StoTherm® Exterior Insulation and Finish Systems (EIFS):** Insulation board must be rasped and free of all bond-inhibiting materials.

**Sheathing:** (Gypsum sheathing in compliance with ASTM C-79 or Glass Mat faced gypsum sheathing in compliance with ASTM C-1177 [such as Dens-Glass Gold]). Surface must be clean, dry and free of all bond-inhibiting materials. Sheathing must be installed and protected in accordance with manufacturer's requirements. Remove and replace weather damaged sheathing. Avoid application over irregular, out of plane surfaces.

electric drill and paddle. Allow to set approximately five minutes, adjust mix if necessary by adding up to 12 fl. oz. (.35 L) of water per bag, remix to a uniform consistency. Avoid retempering after mixing of product. Do not exceed maximum amount of water in mix ratio.

recommended thickness of the reinforced base coat is 1/16" (1.6 mm) when dry. Reapply additional base coat if necessary to achieve minimum thickness as soon as the first application is dry.

**As a skim coat:** Apply in one application to a maximum thickness of 1/16" (1.6 mm) to the prepared surface and smooth the surface.

### Curing/Drying

Dries within 24 hours under normal drying conditions [70°F (21°C), 50% RH]. Allow additional drying time during cold and/or humid weather before application of primer, then finish, to hardened Sto BTS Plus.

Protect from rain and freezing until completely dry.

Sto recommends priming using the appropriate Sto Primer prior to application of finish.

### Clean Up

Clean tools and equipment with water immediately after use. Dried material can only be removed mechanically.

## Health And Safety

### Health Precautions

Contains Portland cement and crystalline-free silica. Avoid breathing dust. As with any chemical construction product, exercise care when handling.

### Safety Precautions

Use adequate ventilation. Use of a NIOSH/MSA-approved dust respirator, safety goggles and protective gloves is recommended.

### First Aid

**SKIN CONTACT:** Wash thoroughly with soap and water.  
**EYE CONTACT:** Flush immediately with water for 10-15 minutes and contact a physician.  
**RESPIRATORY PROBLEMS:** Remove affected person to fresh air immediately and contact a physician.  
**HYGIENE:** Wash hands immediately after use. Wash clothing before re-use.

### Spills

Collect in an appropriate container. Uncured material may be removed with water.

### Disposal

Dispose in accordance with local, state or federal regulations.

### Warning

KEEP CONTAINER CLOSED WHEN NOT IN USE. KEEP OUT OF THE REACH OF CHILDREN. NOT FOR INTERNAL CONSUMPTION. FOR INDUSTRIAL USE ONLY. Consult the Material Safety Data Sheet for further health and safety information.

### LIMITED WARRANTY

THIS PRODUCT IS SUBJECT TO A WRITTEN LIMITED WARRANTY WHICH CAN BE OBTAINED FREE OF CHARGE FROM: Sto Corp., 3800 Camp Creek Parkway, Building 1400, Suite 120, Atlanta, GA 30331; Tel: 404-346-3666; Fax: 404-346-3119.

Refer to Sto Specifications for more complete information on proper use and handling of this product.

### ATTENTION

This product is intended for use by qualified professional contractors, not consumers, as a component of a larger construction assembly as specified by a qualified design professional, general contractor or builder. It should be installed in accordance with those specifications and Sto's instructions. Sto Corp. disclaims all, and assumes no, liability for on-site inspections, for its products applied improperly, or by unqualified persons or entities, or as part of an improperly designed or constructed building, for the nonperformance of adjacent building components or assemblies, or for other construction activities beyond Sto's control. Improper use of this product or use as part of an improperly designed or constructed larger assembly or building may result in serious damage to this product, and to the structure of the building or its components. **STO CORP. DISCLAIMS ALL WARRANTIES EXPRESSED OR IMPLIED EXCEPT FOR EXPLICIT LIMITED WRITTEN WARRANTIES ISSUED TO AND ACCEPTED BY BUILDING OWNERS IN ACCORDANCE WITH STO'S WARRANTY PROGRAMS WHICH ARE SUBJECT TO CHANGE FROM TIME TO TIME.** For the fullest, most current information on proper application, clean-up, mixing and other specifications and warranties, cautions and disclaimers, please refer to the Sto Corp. website, [www.stocorp.com](http://www.stocorp.com).

### Sto Corp.

3800 Camp Creek Parkway  
Building 1400, Suite 120  
Atlanta, GA 30331  
Tel: 404-346-3666  
Toll Free: 1-800-221-2397  
Fax: 404-346-3119  
[www.stocorp.com](http://www.stocorp.com)



S155-727 07/08 VEN 5609

